
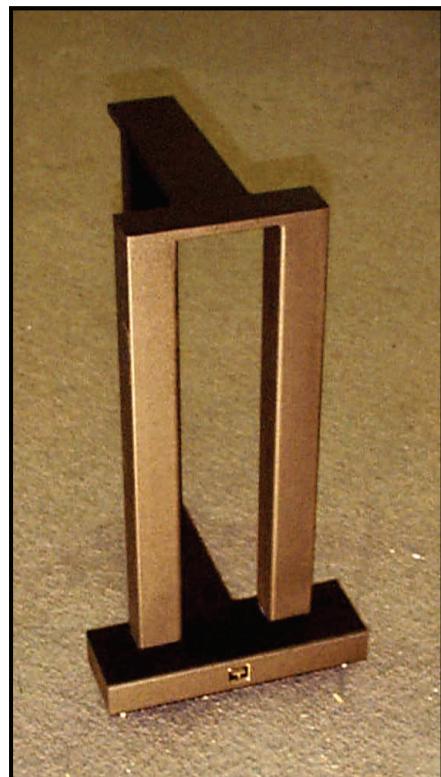


***SET UP INSTRUCTIONS
FOR SOUND ANCHOR
B&W 805 NAUTILUS STANDS***

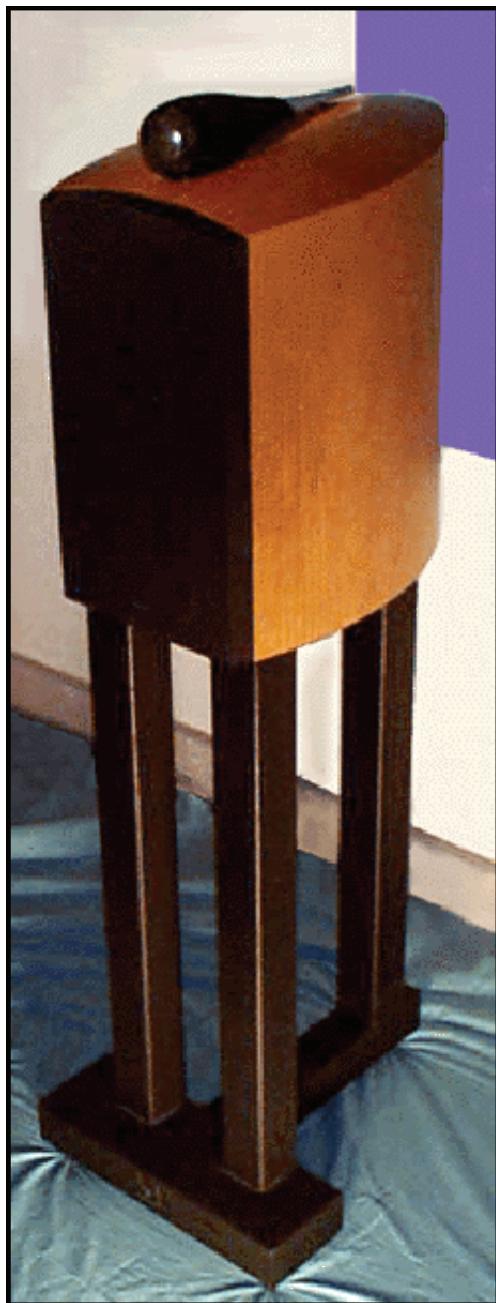

**SOUND ANCHORS INC.
2835 KIRBY AVE. #110
PALM BAY, FL. 32905 USA
PHONE/FAX (407) 724 1237
e-mail snd@iu.net**

Thank you for purchasing Sound Anchor stands for your B&W 805 Nautilus Speakers. Sound Anchors has gone through great pains We designed your stands to optimize the driver position in relation to your listening position and to lessen the effect that your room will have on the sound coming from your speakers. This means that your speakers will be able to reproduce both music and movie soundtracks more accurately and with more life than is possible with your speakers on the floor.

Speaker placement is the single most important factor when it comes to system setup. There is no magic or scientific formula that will ensure best position so please take the time to experiment with speaker placement in your room.

INVENTORY

1. 1 ea. Stand Weldments
2. 3 ea. Spikes
3. 3 ea. 3/8-16 Jam Nuts
4. 3 ea. 3/8" SAE Flatwashers
5. 3 ea. Sorbathane Bluedots
6. 1 ea. 1/4" SAE Flatwashers
7. 1 ea. M-6 X 35mm Soc hd. Cap Screw
8. 1 ea. Hollow Stem Bushing

SETUP

1. Install spikes, 3/8" washers and 3/8-16 jam nuts into the threaded inserts on the bottom of the stand.

2. Adjust the spikes so that the top of the speaker is level and tighten the jam nuts.

3. Place 1 bluedot on each corner of the top tee. (see figure 2)

4. Set the speaker on top of the stand so that the front mounting holes of the speakers line up with the hole in the middle of the front cross bar

5. Insert the stem bushing into the stand from the bottom.

6. Fasten the speaker to the stand using the M-6 soc. hd. cap screw. Finger tighten + 1/2 turn.

